

## Portable Compressors MOBILAIR M 20

With the world-renowned SIGMA PROFILE 

Flow rate 2.0 m<sup>3</sup>/min



M20

**Worldwide sales and service network**



As one of the world's largest compressor manufacturers, KAESER KOMPRESSOREN is represented throughout the world by a comprehensive network of branches, subsidiary companies and authorised partners in over 100 countries.

With innovative products and services, KAESER KOMPRESSOREN's experienced consultants and engineers help customers to enhance their competitive edge by working in close partnership to develop progressive system concepts that continuously push the boundaries of performance and compressed air efficiency. Moreover, the decades of knowledge and expertise from this industry-leading system provider are made available to each and every customer via the KAESER group's global computer network.

These advantages, coupled with KAESER's worldwide service organisation, ensure that all products operate at peak performance at all times and provide maximum availability.

**Maximum versatility**

The MOBILAIR 20 is the ideal choice for powering equipment such as breakers and impact borers. Meticulous construction and premium quality components ensure trouble-free operation in ambient temperatures ranging from -10 °C to +45 °C. A low temperature version is also available for use in colder ambient temperatures. Versatility is further enhanced by the chassis, as it can be equipped with or without an overrun brake and is available with a fixed or height adjustable tow bar. Stationary versions can be installed either on skids or machine mounts (all stationary systems feature a metal enclosure).



**Powerful energy-saving team: Kubota engines and KAESER airends**

The M 20 features a specially designed energy-saving SIGMA profile air end, which is directly driven by a water-cooled three-cylinder Kubota diesel engine. Direct drive eliminates the transmission losses associated with other systems, consequently providing more air for less fuel.

Separate air filters for engine and compressor:  
The air filters are specially tailored to suit required air demand and therefore ensure dependable system operation. A further important design detail is the electric fuel pump which enables quick and simple de-aeration of the diesel lines. The need for laborious manual pumping is therefore eliminated.

# MOBILAIR M 20

## Lightweight – Quiet – Powerful



**Lightweight**

A compressor doesn't necessarily have to be heavy in order to deliver powerful performance. The M 20 has a low operational weight of less than 460kg and is therefore incredibly simple to manoeuvre and transport. Moreover, its 30 litre diesel fuel capacity ensures that the M 20 has more than enough power available to last an entire work shift.



**Service-friendly**

The enclosure opens to provide excellent component access and therefore greatly simplifies all servicing and maintenance tasks.



**PE enclosure**

Made from roto-moulded polyethylene, the double-walled sound enclosure ensures long-term value retention and is both corrosion and scratch-resistant.



**Metal enclosure**

The sound-proofed all-steel enclosure ensures long-term corrosion resistance and value retention thanks to high quality zinc priming and tough powder coating. Stationary systems are always equipped with metal enclosures.



**Alternative colours**

The corrosion- and scratchproof roto-moulded polyethylene enclosure is also available in the following colours:  
Blue – Equivalent to RAL 5017  
Green – Equivalent to RAL 6024  
Red – Equivalent to RAL 3020  
Orange – Equivalent to RAL 2009  
Other enclosure colours and custom paintwork for metal components are available upon request.



**Simple to operate**

Operation is made simple via user-friendly icons and a single start switch with pre-heat function. The unit also features fully automatic monitoring and shutdown, whilst a pressure gauge and air end temperature display enable all information to be viewed at a glance.



**Patented Anti-Frost Control**

Specially developed for portable compressors, the patented Anti-Frost Control automatically adjusts operating temperature in relation to ambient temperature. This prevents air tools from freezing up and significantly extends service life.






## Hose reel

The pre-installed hose reel holds 20m of lightweight hose which does not have to be fully reeled out for operation. As the hose is installed within the compressor unit, this not only enhances hose service life and availability, but also protects it from damage (splitting, stretching, being run over) and contamination.

## Dimensions

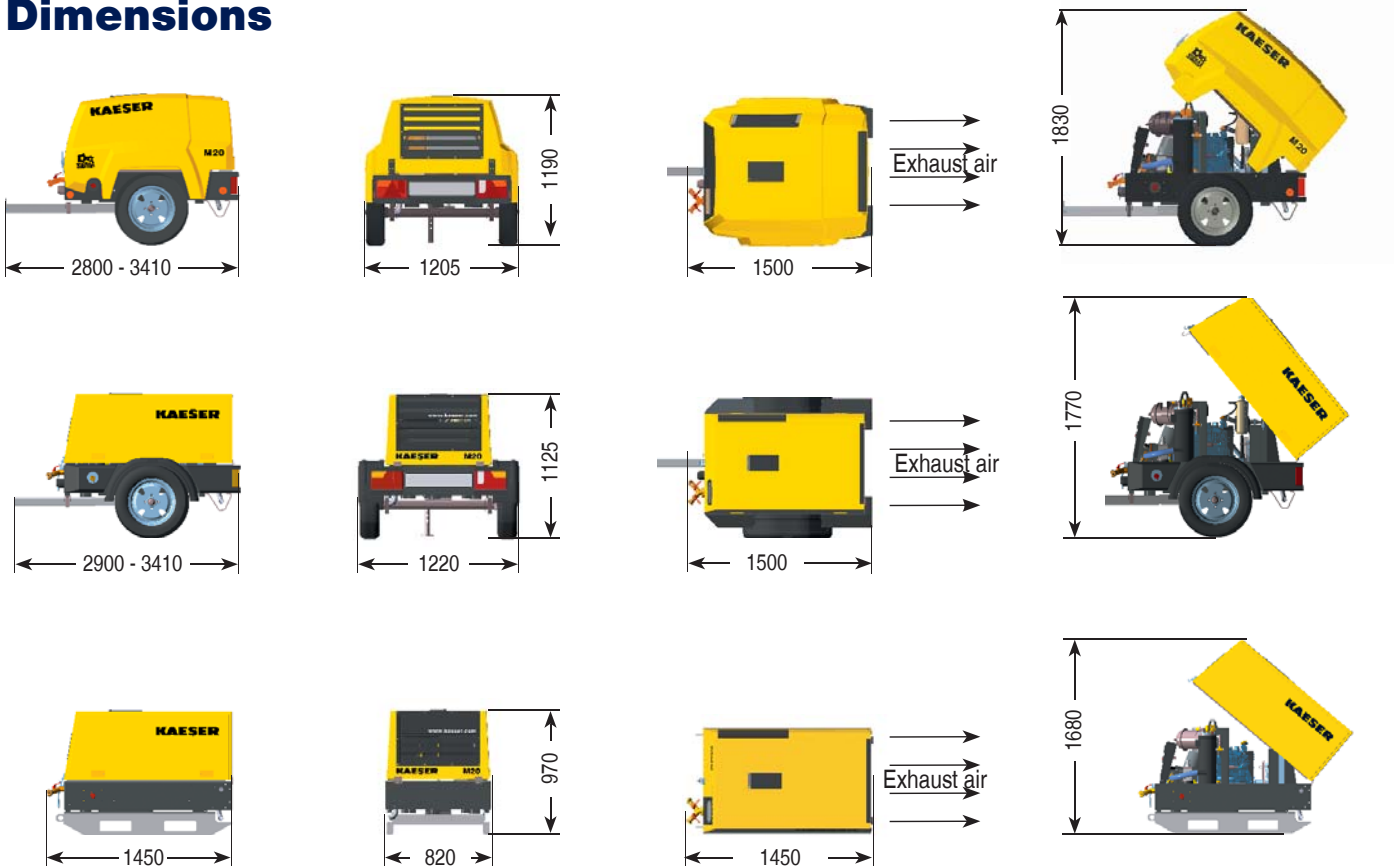

## Technical specifications – MOBILAIR M 20

Model	Compressor		3-cylinder diesel engine (Water-cooled)				Package				
	Flow rate m <sup>3</sup> /min	Operating pressure bar	Make	Model	Rated motor power kW	Speed at full load rpm	Fuel tank capacity l	Operational weight kg	Sound power level dB(A)*	Sound pressure level dB(A)**	Air outlet
M 20	2.0	7	Kubota	D 722	14	3600	30	457	<97	68	2x G¾

\*) Guaranteed sound power level to directive 2000/14/EU – \*\*) Surface sound pressure level to ISO 3744, (r = 10 m)



### KAESER KOMPRESSOREN SE

P.O. Box 2143 – 96410 Coburg – GERMANY – Tel +49 9561 640-0 – Fax +49 9561 640130  
e-mail: productinfo@kaeser.com – www.kaeser.com